


Technology meets Anatomy



LEONARDO[®] Universal and ingenious

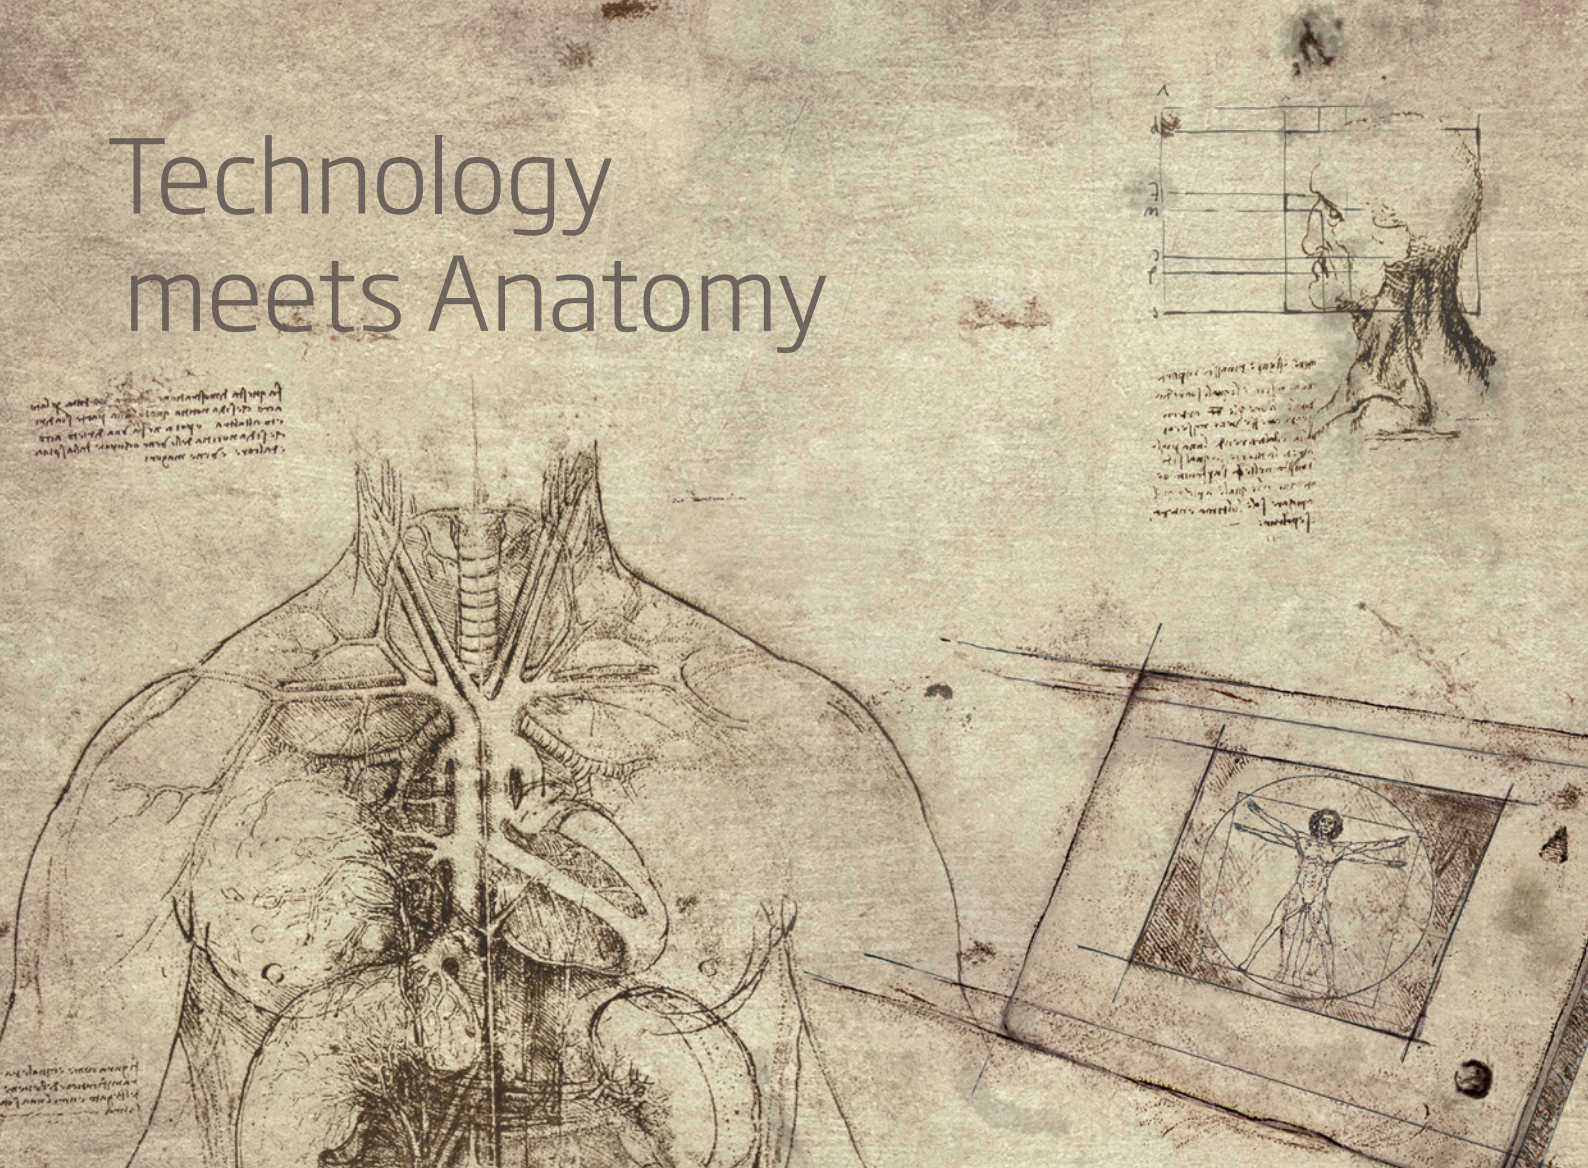


- Cutting
- Vaporization
- Tissue shrinking
- Coagulation
- Dual wavelength laser
individually selected
or blended




A whole new world of therapeutic applications and clinical results

biolitec® presents the LEONARDO® Laser - the most versatile and universal medical laser in the market today. This highly compact diode laser features the combination of two wavelengths, 980 nm and 1470 nm offering a variety of tissue interactions. Each wavelength can be individually selected or **blended** together to offer the perfect desired tissue effects such as incision, excision, vaporization, hemostasis and coagulation of soft tissue with contact or non-contact delivery options for open and endoscopic procedures. For the first time the clinicians can perform laser surgery selectively, with settings individually tailored to the tissue type and the desired tissue effects and thus corresponding to the therapeutic needs.

The ability to choose a wavelength mix opens a whole new world of therapeutic applications and improves both the treatment outcomes for the patients and **extends** the clinicians experience and expertise. The LEONARDO® Laser is designed to work in perfect combination with a broad spectrum of special medical fibers and application kits developed by biolitec® and its companies. biolitec® is one of the **world's most** technologically advanced suppliers of fiberoptic products. The biolitec® treatment methods are routinely performed and validated in highly respected medical centers worldwide and are the number one choice for treating a wide variety of diseases and medical conditions.

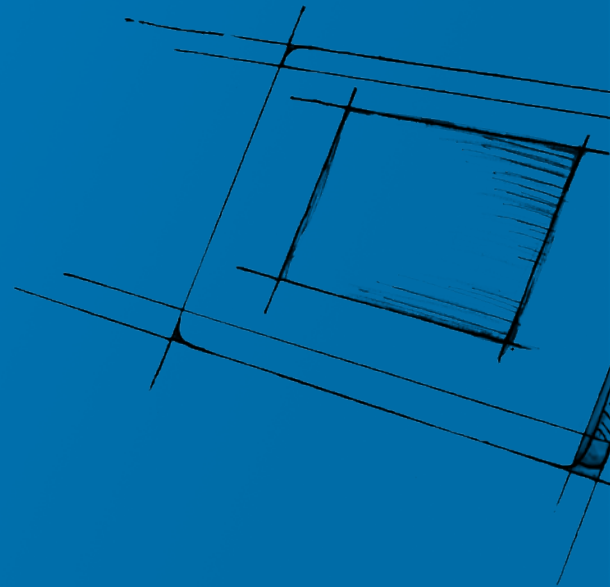

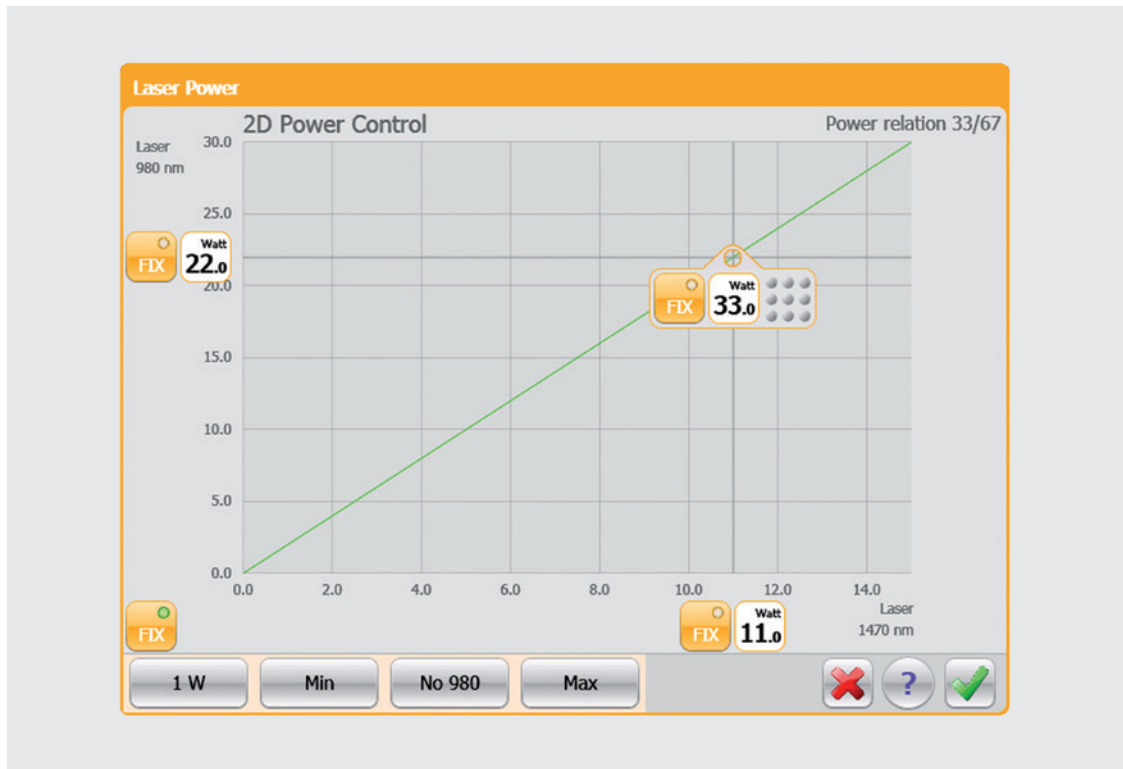

2D Power Control

LEONARDO®'s intuitive 2D Power Control enables the user to choose a combination of different wavelengths and power settings with a simple touch of the screen.

New Fiber Connector

The new fiber connector facilitates to plug the fiber into the laser. It is equipped with an electronic signature for increased patient safety. It prevents usage beyond the product's lifetime and hazards caused by inserting unsuitable fibers to the laser.

Advantages

Versatile and universal

- Broad spectrum of minimally invasive therapeutic laser applications

User-Friendly


- Intuitive use with touch screen and fast set-up
- Selection between pre-set modes or individualized settings
- Choice between green or red aiming beam

Economic

- Two wavelength in one compact and space-saving laser system
- Multidisciplinary use
- Low-maintenance and reliable laser diodes



Special medical fibers and application kits available for minimally invasive laser therapies of:

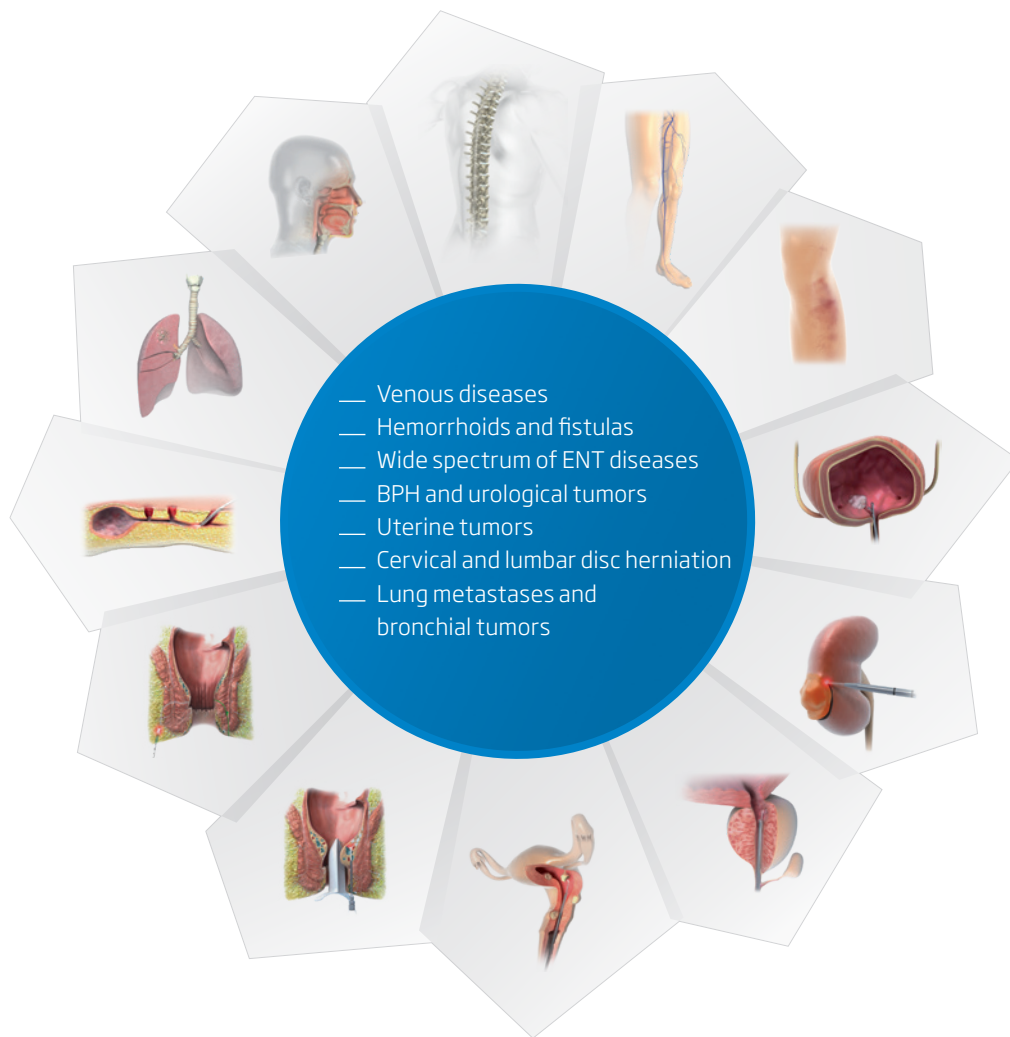



LEONARDO®

LEONARDO® DUAL 45

VISIBLE LASER RADIATION
AVOID EYE OR SKIN EXPOSURE TO
DIRECT OR INDIRECT RADIATION

CLASS 4 LASER PRODUCT
Diode-Laser 980 +/- 30 nm CW 30 W (Max.)
Diode-Laser 1470 +/- 30 nm CW 15 W (Max.)
EN 60825-1:2008 EN 60601-2-22:2007

VISIBLE LASER RADIATION
AVOID EYE EXPOSURE TO DIRECT RADIATION

CLASS 3R LASER PRODUCT
Diode-Laser 635 +/- 10 nm CW 4 mW (Max.) (Aiming)
Diode-Laser 532 +/- 10 nm CW 1 mW (Max.) (Aiming)
EN 60825-1:2008 EN 60601-2-22:2007



CE 1984

CeramOptec GmbH
Siemensstr. 44, D-53121 Bonn

| | |
|------------------------|--|
| Model | LEONARDO® DUAL 45 |
| REF | SL980+1470nm45W |
| Wavelength | 980 nm and 1470 nm |
| Power max. | 45 Watt (1470 nm/15 Watt + 980 nm/30 Watt) separately adjustable |
| Fiber diameter | ≥ 360 µm |
| Aiming beam | 532 nm and 635 nm, green 1 mW, red 4 mW, user controlled intensity |
| Treatment mode | CW, Pulse Mode, ELVeS® Signal, ELVeS® Segment, Derma Mode |
| Pulse duration/-break | 0.01 – 60 sec / 0.01 – 60 sec |
| Power supply | 110 - 240 VAC, 50 / 60 Hz, 450 VA |
| Dimensions (H × W × D) | approx. 28 cm × 37 cm × 9 cm |
| Weight | approx. 8.5 kg |

LEONARDO® DUAL 200

VISIBLE LASER RADIATION
AVOID EYE OR SKIN EXPOSURE TO
DIRECT OR INDIRECT RADIATION

CLASS 4 LASER PRODUCT
Diode-Laser 980 +/- 30 nm CW 160 W (Max.)
Diode-Laser 1470 +/- 30 nm CW 40 W (Max.)
EN 60825-1:2008 EN 60601-2-22:2007

VISIBLE LASER RADIATION
AVOID EYE EXPOSURE TO DIRECT RADIATION

CLASS 3R LASER PRODUCT
Diode-Laser 635 +/- 10 nm CW 4 mW (Max.) (Aiming)
Diode-Laser 532 +/- 10 nm CW 1 mW (Max.) (Aiming)
EN 60825-1:2008 EN 60601-2-22:2007



CE 1984

CeramOptec GmbH
Siemensstr. 44, D-53121 Bonn

| | |
|------------------------|--|
| Model | LEONARDO® DUAL 100 |
| REF | SL980+1470nm100W |
| Wavelength | 980 nm and 1470 nm |
| Power max. | 100 Watt (1470 nm/15 Watt + 980 nm/85 Watt) separately adjustable |
| Fiber diameter | ≥ 360 µm |
| Aiming beam | 532 nm and 635 nm, green 1 mW, red 4 mW, user controlled intensity |
| Treatment mode | CW, Pulse Mode, ELVeS® Signal, ELVeS® Segment, Derma Mode |
| Pulse duration/-break | 0.01 – 60 sec / 0.01 – 60 sec |
| Power supply | 110 - 240 VAC, 50 / 60 Hz, 850 VA |
| Dimensions (H × W × D) | approx. 28 cm × 37 cm × 9 cm |
| Weight | approx. 8.5 kg |

| | |
|------------------------|--|
| Model | LEONARDO® DUAL 200 |
| REF | SL980+1470nm200W |
| Wavelength | 980 nm and 1470 nm |
| Power max. | 200 Watt (1470 nm/40 Watt + 980 nm/160 Watt) separately adjustable |
| Fiber diameter | ≥ 360 µm |
| Aiming beam | 532 nm and 635 nm, green 1 mW, red 4 mW, user controlled intensity |
| Treatment mode | CW, Pulse Mode, ELVeS® Signal, ELVeS® Segment, Derma Mode |
| Pulse duration/-break | 0.01 – 60 sec / 0.01 – 60 sec |
| Power supply | 110 - 240 VAC, 50 / 60 Hz, 850 VA |
| Dimensions (H × W × D) | approx. 20 cm × 37 cm × 26 cm |
| Weight | approx. 15 kg |

Why did we name our laser LEONARDO®?



Leonardo was born in Vinci, near Florence, in 1452. He showed early interest in many different subjects and a precocious talent for drawing. During his career he worked for many illustrious men of his age: the Medici family in Florence, Ludovico il Moro and Francesco Sforza in Milan, Louis XII and Francis I of France and many others. Along with his profession, he applied himself in countless different fields. He studied natural sciences firsthand, discovering new (at that time) phenomena in geology, astronomy, botany, hydraulics, etc. He was a prolific inventor: he produced projects, prototypes and concepts for many applications as the parachute, a surface-supplied diving suit, different artillery pieces, warships, a tank, a rudimentary helicopter, a bicycle and many

more. Leonardo da Vinci was also hired as an engineer, mainly for hydraulic and military structures and applications.

His contribution to human anatomy is of the highest importance: at his time anatomy and natural sciences in general were approached in a purely theoretical fashion, by studying the texts of the ancient authors. Da Vinci on the contrary studied the human body through the dissection of corpses (a forbidden practice in that period) and produced illustrations of the different apparatuses, which have been used in anatomy texts until recent times. Due to this extraordinary eclecticism, **Leonardo da Vinci is universally regarded as the epitome of the universal genius.**

biolitec® worldwide

biolitec AG

Vienna, Austria
phone: +43 1 3619 909 50
info@biolitec.de
www.biolitec.com

biolitec biomedical technology GmbH

Jena, Germany
Phone: +49 3641 519 53 0

biolitec Schweiz GmbH

Wollerau, Switzerland
Phone: +41 55 555 30 20

biolitec Italia SRL

Milano, Italy
Phone: +39 02 8423 0633

biolitec T. C. S. V. P. Ltd.

Istanbul, Turkey
Phone: +90 216 574 7456

000 biolitec Spb

Saint-Petersburg, Russia
Phone: +7 812 4493752

biolitec FZ LLC

Dubai, UAE
Phone: +971 44 29 85 92

biolitec laser science and technology Shanghai Ltd.

Shanghai, China
Phone: +86 21 6308 8856

biolitec Sdn. Bhd.

Selangor, Malaysia
Phone: +60 3 5569 7158

biolitec India Private Ltd.

Bangalore, India
Phone: +91 265 3201106

PT. Biolitec

Tangerang, Indonesia
Phone: +62 21 537 2994

biolitec Korea Ltd.

Seoul, Republic of Korea
Phone: +82 2 701 4707

Equipos Laser de Uso Medico y Fibra Optica SA de CV

México City, Mexico
Phone: +52 155 55 731800

biolitec BCIE LTDA

São Paulo, Brazil
Phone: +55 11 2093 8602

CeramOptec GmbH

Bonn, Germany
Phone: +49 228 979670

Ceram Optec SIA

Riga, Latvia
Phone: +371 653 25 994



All fibers are free of latex and DEHP. Our fibers are single use products (unless otherwise indicated) delivered sterile for immediate use.

Imprint

biolitec AG
Untere Viaduktgasse 6/9
A-1030 Wien
Phone: +43 1 3619 909 50
www.biolitec.com